

STARTRAC

EU MODEL 263 - STAGE V

THE **ROAR** GETS **LOUDER**



8G

THE EIGHTH
GENERATION

FROM THE **LAND** OF **LIONS**



MADE IN INDIA

EU-ENGLISH

STARTRAC

EU MODEL 263 - STAGE V

Powered by
MITSUBISHI DIESEL ENGINE

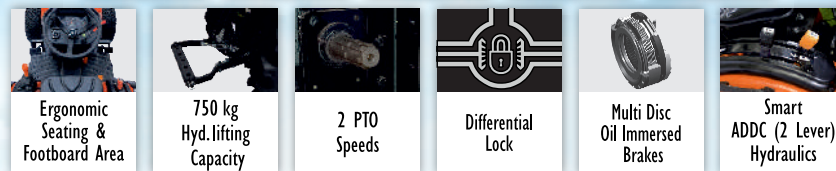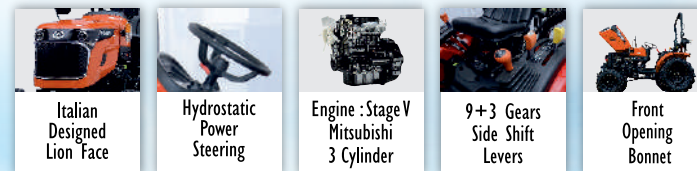

Narrow Track Option Separately Available in this Model



Also Available

50+ Types of Matching Implements



	SPECIFICATIONS	STARTRAC 263 4WD (Agricultural Tyres)	STARTRAC 263 4WD (Turf Tyres)	STARTRAC 263 4WD (Industrial/Flotation Tyres)	STARTRAC 263 4WD (Agricultural Wide Tyres)	STARTRAC 263 4WD (Galaxy Garden Pro Tyres)	STARTRAC 263 4WD (Wider F-Agri Tyres)	STARTRAC 263 4WD (Basic Agri Tyres)
Engine	Engine Horse Power Ps(kW)	25						
	Engine Type	Mitsubishi Stage-V S3L2						
	No. of Cylinder	3						
	Capacity (CC)	1319						
	Rated Speed (RPM)	2500						
	Cooling System	Liquid Cooled						
	Bore / Stroke (mm)	78/92						
	Max Torque (Nm) @ RPM	76.3 (Nm) @ 2000 RPM						
Tyres	Front	180/85D12	23 x 8.5 - 12	23 x 8.5 - 12	6.5/80-12	220/55R12	23 x 8.5 - 12	5.00 x 12
	Rear	8.30 x 20	33 x 15.5 - 16.5	33 x 15.5 - 16.5	280/70R18	280/70R16	280/70R18	8.00 x 18
Transmission	Type	Sliding Mesh Transmission : Side Shift Gear Levers						
	Gears	9 Forward, 3 Reverse						
	Max. Speed (km / hr.)	21.45	20.25	20.20	20.46	19.06	20.46	20.20
	PTO RPM	540 & 1000 (540E)						
	Steering	Hydrostatic Power Steering						
	Brake Type	Multi Disc Oil Immersed						
Hyd.	Hydraulic System	Auto Draft Sensing & Depth Control (2 Levers)						
	Lift Capacity (kgs.)	750 (at Lower Link Point)						
	No. of Pumps	2 (One for Hydrostatic Steering & Other for Hydraulic System)						
	Auxiliary Hydraulics	1 DA Auxiliary Hydraulics with 2 QRCs						
Dimensions	Size LxWxH (mm)	2700* x 1080 x 2100	2700* x 1490 x 2050	2700* x 1490 x 2050	2700* x 1200 x 2060	2700* x 1220 x 2030	2700* x 1220 x 2060	2700* x 997 x 2080
	Wheel Base (mm)	1490	1490	1490	1490	1490	1490	1490
	Rear Track Center (mm)	811 to 988	1080	1080	845 to 988	935	845 to 988	920
	Weight (kg)	950	992	1020	952	959	956	929

*Dimensions are with Standard Lower Links, it may vary with longer linkages.

#+/- 5% Tolerance variations

Note : Products undergo continuous upgradations. Hence, above mentioned specifications are subject to change without prior notice.